




## TOTAL MIRROR

Thanks to its very high metal density, this film will transform your windows into a beautiful mirror, without optical distortion.

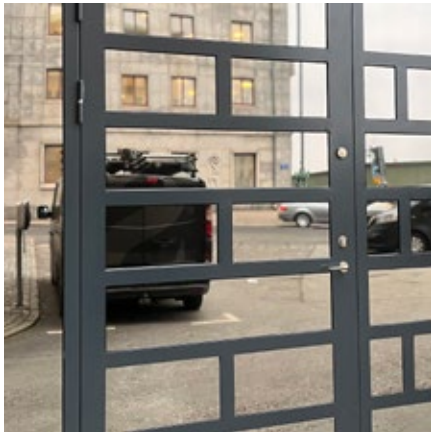

Fire-resistance rating



Storage from -5°C to +40°C  
**3 YEARS**



REACH RoHS compliant  
**RESPECTED**

### TECHNICAL DATA

Data calculated based on film applied to clear glass 3 mm thick (\* on double glazing 4-16-4)

Ultraviolet transmission	<1%
Visible light transmission	0.5%
Reflection of external visible light	82%
Reflection of internal visible light	82%
Total solar energy rejected	91%
Total solar energy rejected 2 *	88%
Solar ratio:	
Solar energy reflection	78%
Solar energy absorption	18%
Solar energy transmission	4%
Reduction in Solar Glare	99%
G-value	0.09
U-value	5.1
Shading coefficient	0.1
Installation type	Interior
Roll length	30,5 m
Film composition	PET
Thickness	60 µ
Colour from the outside	Silver

### MAINTENANCE

Use soapy water solution for cleaning. Do not clean for at least a month after installation and do not apply any type of stickers or adhesive on the film. For more information read our maintenance instructions and quality standards on [www.solfilmsgrossisten.se](http://www.solfilmsgrossisten.se)

### INSTALLATION ADVICE

Vertical installation and on standard glass surface \*

Clear single pane	✓
Tinted single pane	!
Reflective tinted single pane	✓
Clear double pane	!
Tinted double pane	✗
Reflective tinted double pane	!
Gas-filled double pane - Low E	✗
STADIP EXT. clear double pane	✗
STADIP INT. clear double pane	✗

✓ Yes ! Caution ✗ Not

*Recommended*

*\* Recommendations provided on the basis of a glazed surface covering up to 2.5 m<sup>2</sup>, contact us for definitive details or to obtain a thermal check analysis report.*

### CONSTRUCTION

1. Hard scratch resistant layer, for durability and ease of maintenance during window cleaning
2. High optical quality polyester, with anti IR metal particles deposition
3. Bonding adhesive
4. High optical quality polyester
5. PS adhesive, glass polymerization within 15 days
6. Protection release liner, disposable after installation

