



# Black-Out

## Privacy

SKU: RA1822



GSW® Black Out gloss window film offers total privacy, inside and out. The window film allows virtually no light to pass through and is therefore an effective solution for privacy protection, ideal for hiding for example warehouse stock or a storage space.

### Features:

- Perfect for making situations light and airy.
- Ideal for hiding your view.
- Creates an attractive appearance on facade or vehicle.
- Glass gets a longer lifespan.
- Let no light through.
- Black gloss look.

### PRODUCT PERFORMANCE

UV protection	99%
Light transmission	1%
Reflection of visible light outside	13%
Reflection of visible light inside	13%
Reflection of solar energy	11%
Absorption of solar energy	88%
Transmission of solar energy	65%
Reduction of reflection	100%
Sun transmission	35%
Rejected solar energy single glazing	72%
Rejected solar energy double glazing	65%
G-value	0.26
U-value single	
U-value double	
Shade coefficient	0.2

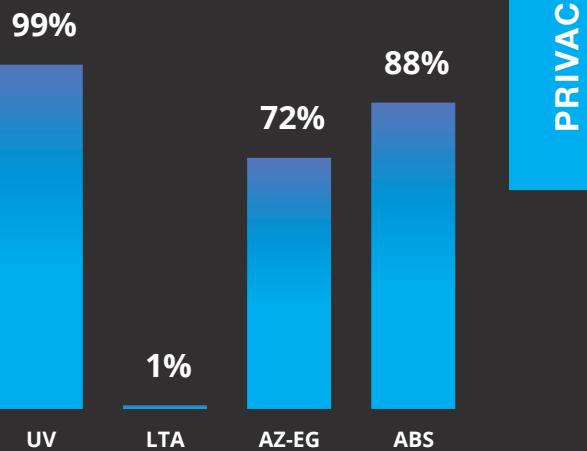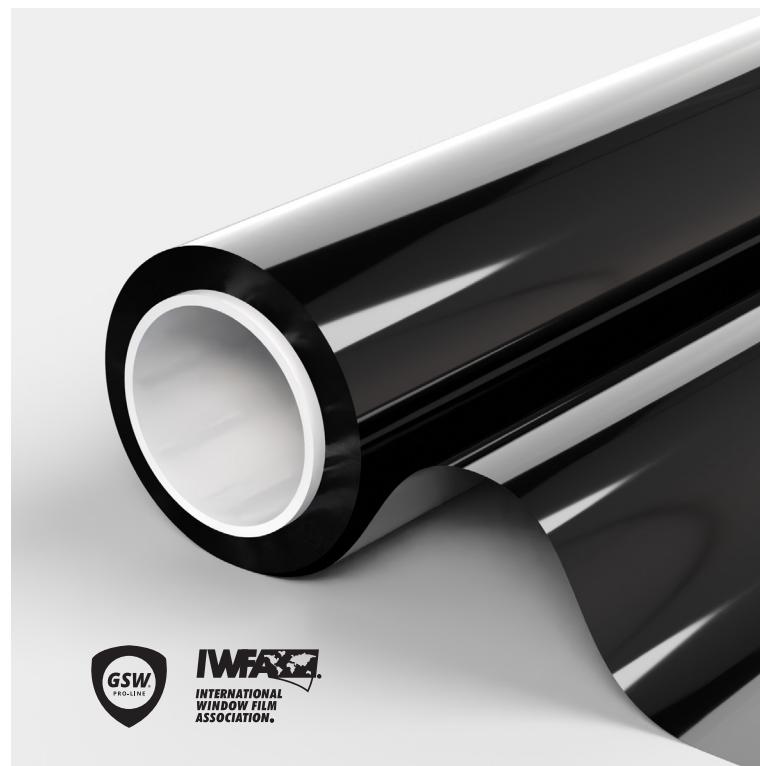

**Warranty** 10 years

**Installation** Inside

**Foil colour** Black

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

Contact sales +31 (0)299-323122 [info@gswfilm.com](mailto:info@gswfilm.com)



# Black-Out

## Privacy

SKU: RA1822

GLASS TYPES	SUITABLE	PRODUCT FEATURES
Clear single pane	Yes	Width(s)
Tinted single pane	Yes	Length(s)
Reflective tinted single pane	Yes	Film thickness
Clear double pane	Yes	Material
Tinted double pane	no	Storage period
Reflective tinted double pane	no	Storage temperature
Gas-filled double pane - Low E	no	Fire class
Stadip ext. clear double pane	no	Manufacturer
Stadip int. clear double pane	no	
Triple glazed	no	
Acrylic 4 mm	Yes	
Polycarbonate 4 mm	no	

**\*Recommendations based on a glass surface of max. 2.5 m2. Contact us for further information.**

### U-value


The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

### Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

### Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

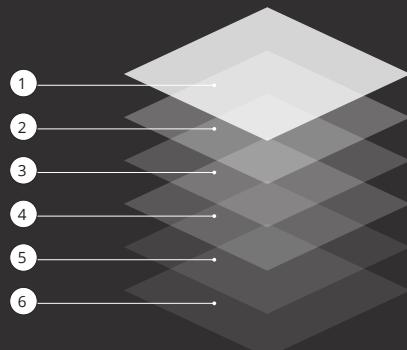

1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Optically high-quality polyester, with metal particles against infrared radiation.
3. Optically high-quality polyester.
4. Self-adhesive glue, glass polymerization within 15 days.
5. Protective film, disposable after installation

**PROFESSIONAL WINDOWFILM**  
**VISIT [GSWFILM.COM](http://GSWFILM.COM)**

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (\*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com



**FREE SAMPLE**