



RS 50 Statisch

Sun protection privacy film Internal

SKU: RZ1525


GSW® RS 50 Static solar heat is kept to a minimum and at the same time maximum natural light incidence is guaranteed. Light reflection is significantly reduced and because the film functions as a one-way mirror, you have no onlookers and the exterior of a house or building gets a modern look.

Features:


- Block infrared Medium.
- Creates an attractive appearance on the facade.
- Mild reflection allows a lot of light to pass through.
- Glass gets a longer lifespan.
- Light Silver glass look.
- View from inside to outside.

PRODUCT PERFORMANCE

| | |
|--------------------------------------|------|
| UV protection | 68% |
| Light transmission | 49% |
| Reflection of visible light outside | 33% |
| Reflection of visible light inside | 32% |
| Reflection of solar energy | 31% |
| Absorption of solar energy | 28% |
| Transmission of solar energy | 41% |
| Reduction of reflection | 50% |
| Sun transmission | 41% |
| Rejected solar energy single glazing | 55% |
| Rejected solar energy double glazing | 59% |
| G-value | 0.42 |
| U-value single | 5.6 |
| U-value double | |
| Shade coefficient | 0.49 |

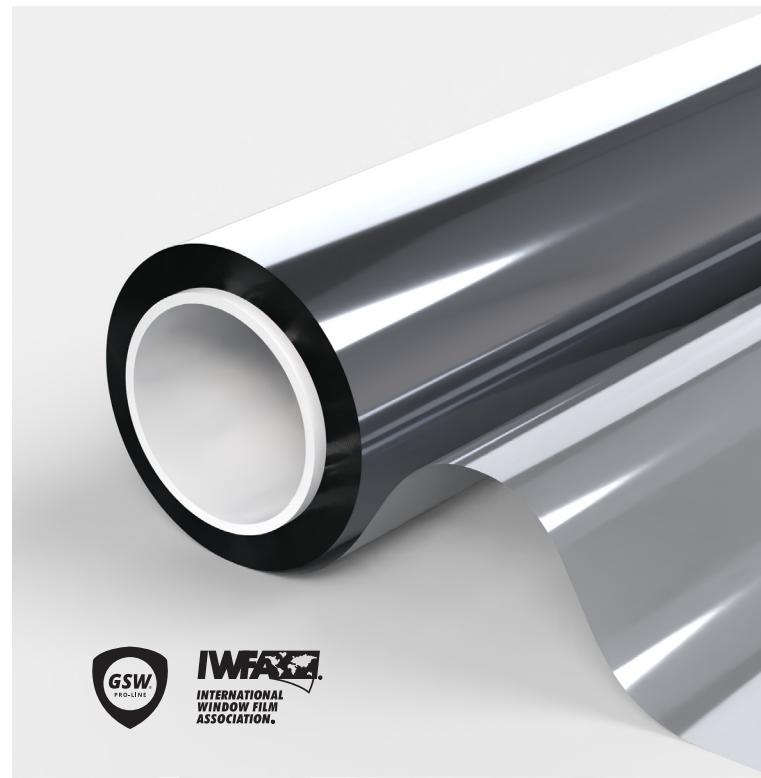

SOLAR

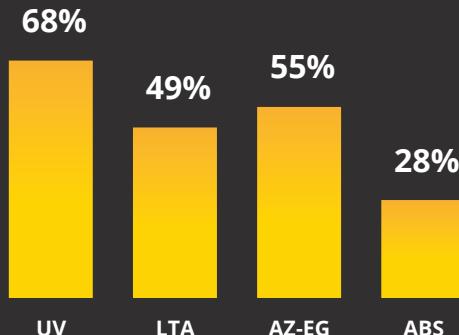

| | |
|--------------|--------------|
| Warranty | years |
| Installation | Inside |
| Foil colour | Light Silver |

**PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM**

Contact sales +31 (0)299-323122 info@gswfilm.com



RS 50 Statisch

Sun protection privacy film Internal

SKU: RZ1525

| GLASS TYPES | SUITABLE | PRODUCT FEATURES |
|--------------------------------|----------|---------------------|
| Clear single pane | Yes | Width(s) |
| Tinted single pane | Yes | Length(s) |
| Reflective tinted single pane | Yes | Film thickness |
| Clear double pane | Yes | Material |
| Tinted double pane | No | Storage period |
| Reflective tinted double pane | No | Storage temperature |
| Gas-filled double pane - Low E | No | Fire class |
| Stadip ext. clear double pane | No | Manufacturer |
| Stadip int. clear double pane | No | |
| Triple glazed | No | |
| Acrylic 4 mm | Yes | |
| Polycarbonate 4 mm | No | |

*Recommendations based on a glass surface of max. 2.5 m². Contact us for further information.

U-value


The lower the U-value, the better the thermal resistance of the foil, with less heat being lost to the outside.

Installation

Install the film with water and green Fairy dishwashing liquid. Under no circumstances use chemicals!

Maintenance

Do not clean the window film or attach stickers or other adhesives for at least 1 month after installation. The film can then be cleaned with water and green Fairy dishwashing liquid. Be careful not to use chemicals!

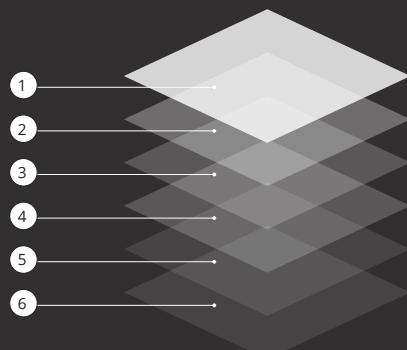

1. Hard scratch-resistant layer for long life and ease of maintenance when cleaning the windows.
2. Polyester / PVC with anti IR metal particles.
3. Static.
4. Protective backing, disposable after installation.

PROFESSIONAL WINDOWFILM
VISIT GSWFILM.COM

GSW accepts no liability for administrative errors and reserves the right to change information without prior notice. This document does not create, specify, modify or replace any new or existing contractual obligations agreed between GSW and the user. Data calculated on the basis of film on clear glass of 3 mm thickness (*on double glass 4-16-4). GSW® is a registered trademark of Glass Solution Windowfilm B.V. ©2024 GSW

Glass Solution Windowfilm B.V. Schepnetstraat 3a, 1446 AL Purmerend +31 (0)299-323 122 info@gswfilm.com

SOLAR



FREE SAMPLE