

FROM THE FOUNDER OF THE #VIKISEWS BRAND




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the most detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com - we are always there to help.

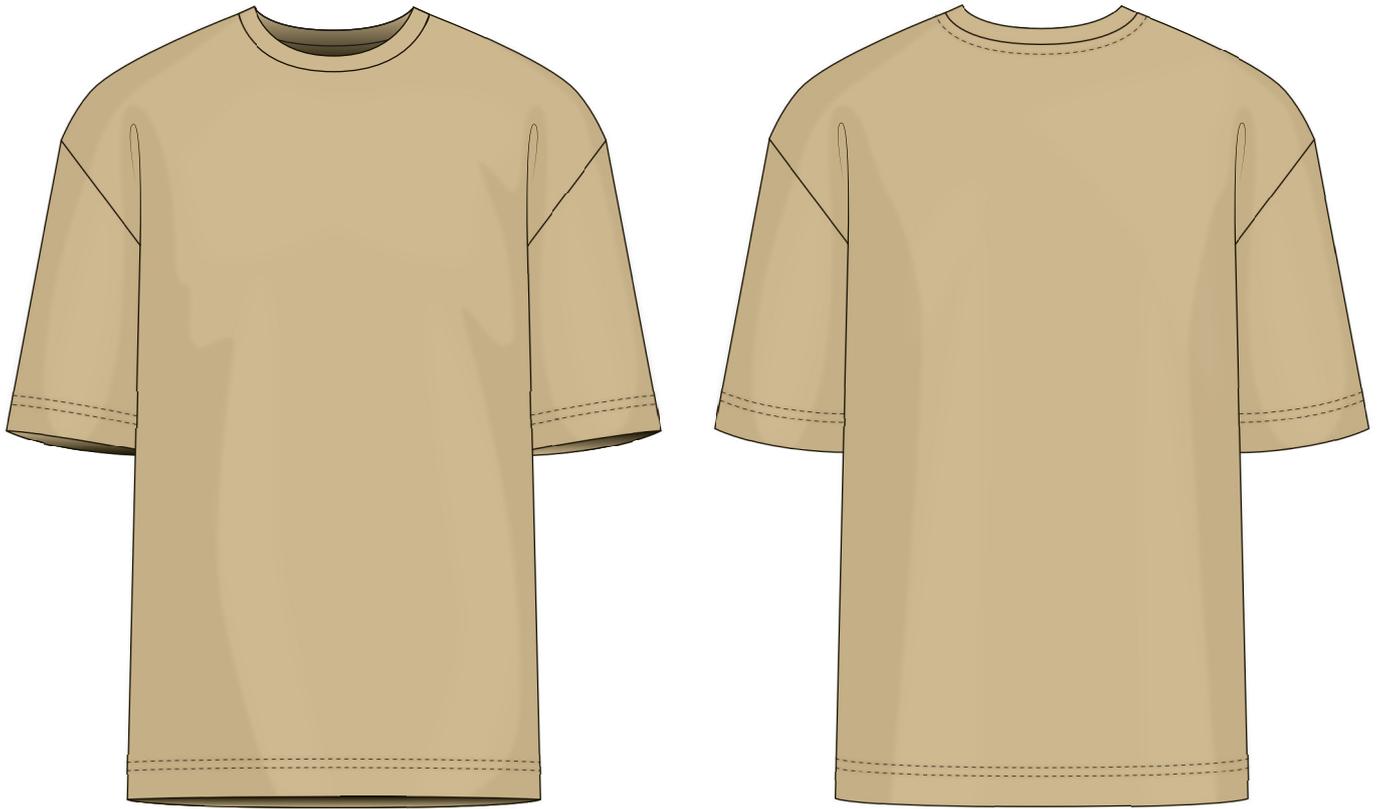

MARC PATTERN DESCRIPTION

Marc is a men's t-shirt with a loose fit and a straight cut. The t-shirt features dropped shoulders and short set-in sleeves. The crew neck is finished with a band. Marc is hip-length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to VikiSews. You may use VikiSews patterns for personal use. It is prohibited to share VikiSews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. According to part 1 of clause 1252 and clause 1301 of the Civil Code of the Russian Federation, failure to comply with the mentioned rules constitutes a breach of the legislation in force in the field of copyright and entails liability of the violator. Illegal use or distribution will be prosecuted in accordance with legislation.

You may use VikiSews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Chest ease	Waistline ease	Hipline ease	Upper arm ease
cm	19.5	31.5	10-20	15
inches	7 5/8	12 3/8	4 - 8	6

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Garment length, cm	Sleeve length, cm
1 (170-176)	71	24
2 (178-184)	74	24
3 (186-192)	77	26
4 (194-200)	80	28

Height, ft	Garment length, in	Sleeve length, in
1 (5'7" - 5'9")	28	9 1/2
2 (5'10" - 6')	29 1/8	9 1/2
3 (6'1" - 6'3")	30 3/8	10 1/4
4 (6'4" - 6'7")	31 1/2	11

SUGGESTED FABRIC

To sew this t-shirt, choose knit fabrics with the following properties:

- medium-weight, soft, medium stretch
- the fabric content can include natural (cotton), artificial (viscose), blends (cotton + polyester, cotton + elastane, viscose + elastane, etc.), and synthetic fibers (polyester, polyester + elastane)
- the following fabrics are recommended: cotton jersey, interlock knits, pique, lightweight French terry.

The t-shirt in the photo is made in cotton jersey. This fabric is medium-weight and has very little stretch. The fabric content is cotton (95%) and elastane (5%).

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance – 3 cm (1 1/8")
- sleeve hem allowance – 3 cm (1 1/8")
- all other seams – 1 cm (3/8").


Take this into account when laying out pattern pieces on the fabric.

CUTTING LAYOUT

Main fabric with a directional print, 180 cm (70") wide, with two folds, for sizes 38-40 in all heights

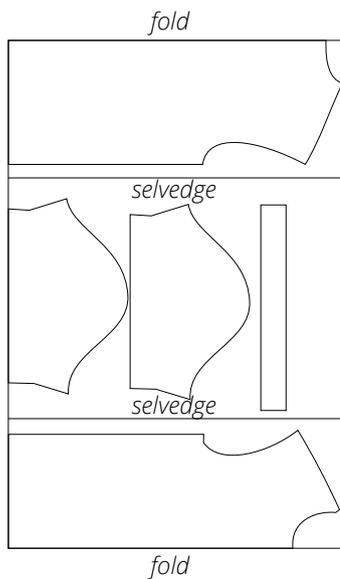


Main fabric with a directional print, 180 cm (70") wide, with two folds, for sizes 42-50 in all heights

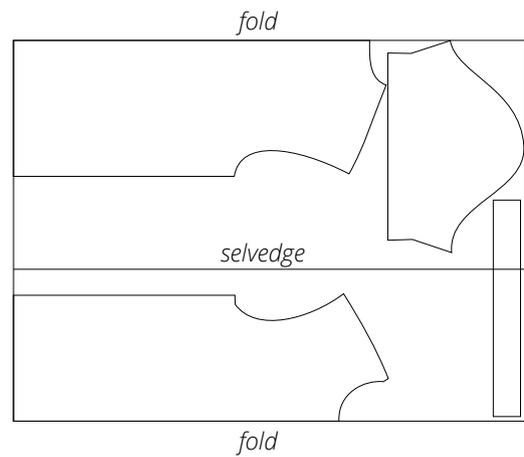


Main fabric with a directional print, 180 cm (70") wide, to be cut-out in two parts, for sizes 52-54 in all heights

1st part: with two folds

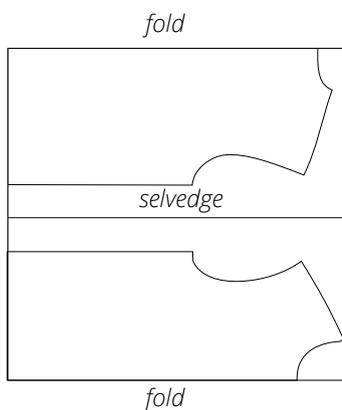

2nd part: with one fold

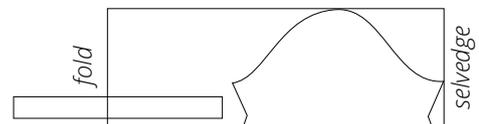


READY? LET'S GET SEWING!

Do not iron the piece, but instead press it section by section, holding it down with the iron a few seconds until that section is adhered and then pressing down the next section. You may use a cotton pressing cloth to protect your iron sole. Once the interfacing process is complete, leave the piece on a hard, flat surface for 15 minutes for it to cool down.



Join the front and back pieces along the shoulder edges, right sides together. Pin, baste, and stitch on the overlocker the shoulder edges with the back piece facing up.

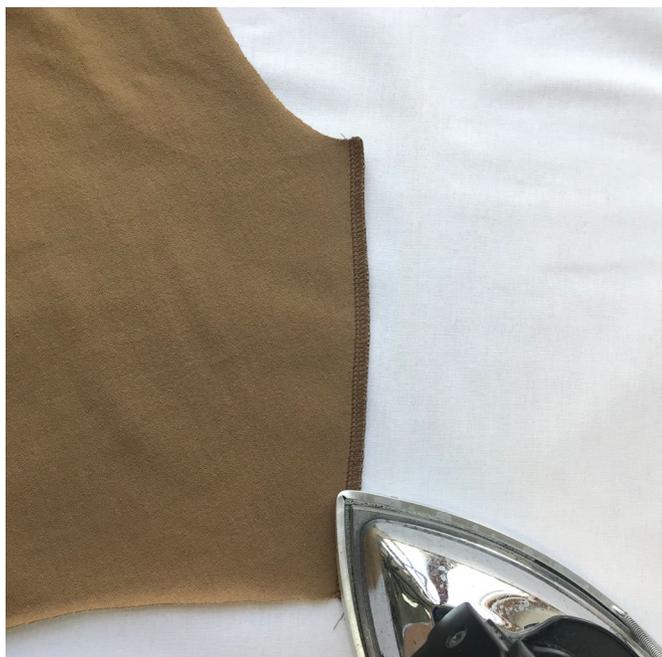

Press the seams flat.