

FROM THE FOUNDER OF THE #VIKISEWS BRAND




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the most detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com - we are always there to help.

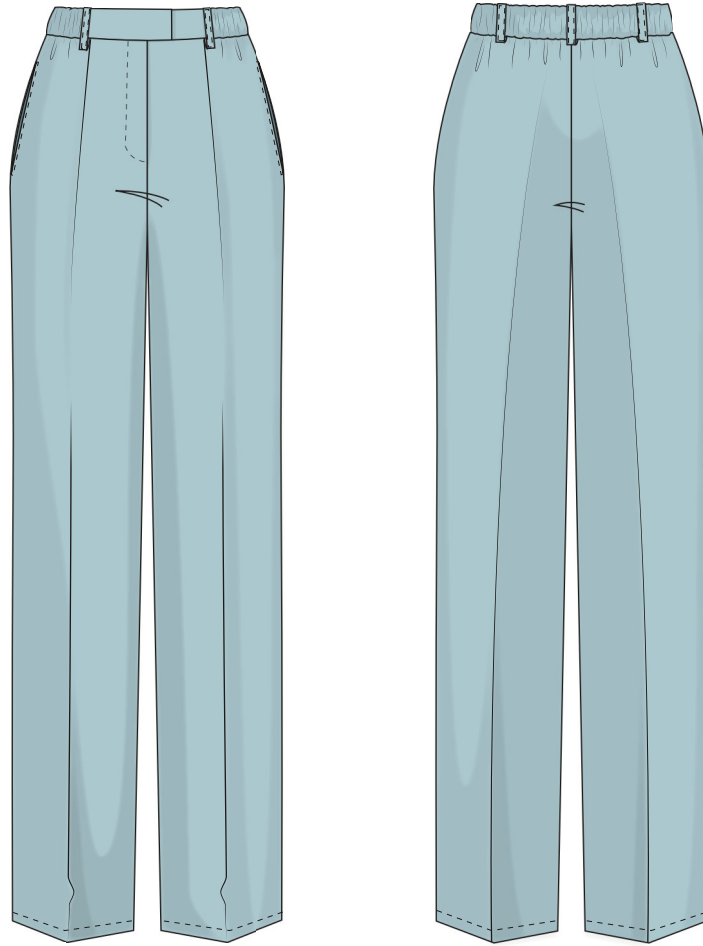

JACQUELINE PATTERN DESCRIPTION

Jacqueline is a pair of classic trousers with a semi-slim straight fit. Pressed crease lines are found on the front and back of the trousers, on the front passing into pleats at the waist line. Trousers pockets are in the side seams. The trousers have a fly front zipper, elastic band in the back of the waistband and belt loops. Upper edge of the waistband is slightly lower than the natural waistline. Jacqueline trousers fasten with a button and buttonhole, overlapping waistband part fastens with a hook and a loop. The trousers are floor length.



FOR YOUR CONSIDERATION!

Patterns of VikiSews are allowed:

- for personal use. It is prohibited to share VikiSews patterns and sewing instructions with third parties, as well as to publish patterns and instructions online for public access. According to part 1 of clause 1252 and clause 1301 of the Civil Code of the Russian Federation, failure to comply with the mentioned rules constitutes a breach of the legislation in force in the field of copyright and entails liability of the violator. Illegal use or distribution will be prosecuted in accordance with legislation.
- for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individual parties.

TOTAL EASE ALLOWANCE

Waistline ease, cm	Hipline ease, cm
5	13

GARMENT LENGTH

Side seam length including waistband

Height, cm	Garment length, cm
1 (154-160)	110
2 (162-168)	114
3 (170-176)	118
4 (178-184)	122

Trousers bottom width, elastic band length, cm

Size	34	36	38	40	42	44	46	48	50	52
Trousers bottom width	27.7	28.2	28.7	29.2	29.7	30.2	30.7	31.2	31.7	32.2
Elastic band length	44	47	50	53	56	60	62	66	69	72

SUGGESTED FABRIC

Woven fabrics with the following properties are suitable for the Jacqueline Trousers:

- Medium weight, with good drape, breathable, soft and non-stretch or with very little stretch, opaque
- the fibre content can include natural (wool, silk, linen), artificial (viscose), blends (wool + silk, wool + polyester, cotton + viscose, etc.) or synthetic (polyester, polyester + elastane)
- the following fabrics are recommended: dress-weight wool, gabardine, silk, cupro, silk velvet.

Attention! We do not recommend very stretchy fabrics (knits) and lightweight sheer fabrics (chiffon, organza, knit lace). The garment on the photo is made of cupro fabric. This fabric is medium weight, has good drape, is soft and non-elastic. The fiber content is 100% cupro.

FABRIC AND NOTIONS REQUIREMENTS

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

1. Main fabric, 140 cm wide, non-directional/no nap, in meters

Height, cm	Size 34	Size 36	Size 38	Size 40	Size 42	Size 44	Size 46	Size 48	Size 50	Size 52
1 (154-160)	1.71	1.74	1.78	1.98	1.98	1.97	1.97	1.97	1.97	2.00
2 (162-168)	1.75	1.78	1.87	2.05	2.04	2.04	2.03	2.04	2.04	2.06
3 (170-176)	1.79	1.82	1.87	2.12	2.12	2.11	2.11	2.11	2.12	2.14
4 (178-184)	1.82	1.85	1.91	2.19	2.19	2.18	2.18	2.18	2.18	2.20

Main fabric, 140 cm wide, with a directional print or pile, in meters

Height, cm	Size 34	Size 36	Size 38	Size 40	Size 42	Size 44	Size 46	Size 48	Size 50	Size 52
1 (154-160)	1.72	1.76	1.79	1.82	2.06	2.26	2.26	2.26	2.26	2.26
2 (162-168)	1.75	1.79	1.82	1.86	2.03	2.33	2.33	2.33	2.33	2.33
3 (170-176)	1.8	1.83	1.87	1.9	2.11	2.42	2.42	2.42	2.42	2.42
4 (178-184)	1.84	1.87	1.9	1.93	2.15	2.49	2.49	2.49	2.49	2.49

2. Lightweight knit or woven interfacing, 140 cm wide

Size	34-36	38-42	44-48	50-52
Yardage, m	0.3	0.35	0.4	0.45



Handstitch along the crease lines to keep them precise during sewing process. This is especially useful in case of slippery silk fabrics.

Prior to fusing the main pieces, we recommend testing the interfacing and/or seam tape interfacing on a scrap piece of the main fabric. Also, check your iron settings: what temperature suits your fabric, can the interfacing be applied with the steam, as well as the time needed to hold the iron over the interfacing.

Fully interface the following pieces:

- right front waistband – 1 piece
- left front waistband – 1 piece

Interface partially:

- front leg – 2 pieces

Also interface:

- seam allowance for the fly (interfacing grainline follows the grainline of the main parts)
- pocket opening seam allowance (the grainline follows the interfacing strip).

For fusing, put the sticky side of the interfacing on top of the back side of the fabric piece (or a section thereof) and press with the iron. Avoid stretching the pieces with the iron. Your movements should be rather pressing than gliding; press and hold for a few seconds until one section is adhered and then press the next section. You may use a cotton pressing cloth to protect your iron sole. Once the fusing is complete, leave the piece on a hard flat surface for 15 minutes for it to cool down.



Press and steam the leg pieces – press and pull the crotch seam on the back legs. In the area from the crotch seam to the knee press the inseam, slightly pulling the fabric. The iron plate runs parallel to the seam, touching the fabric only along 4cm from the edge. Pull the crotch seam in the area of 8-10 cm from the inseam.

Press down the bulge in between.