

# FROM THE FOUNDER OF THE #VIKISEWS BRAND

---




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at [info@vikisews.com](mailto:info@vikisews.com) — we are always there to help.

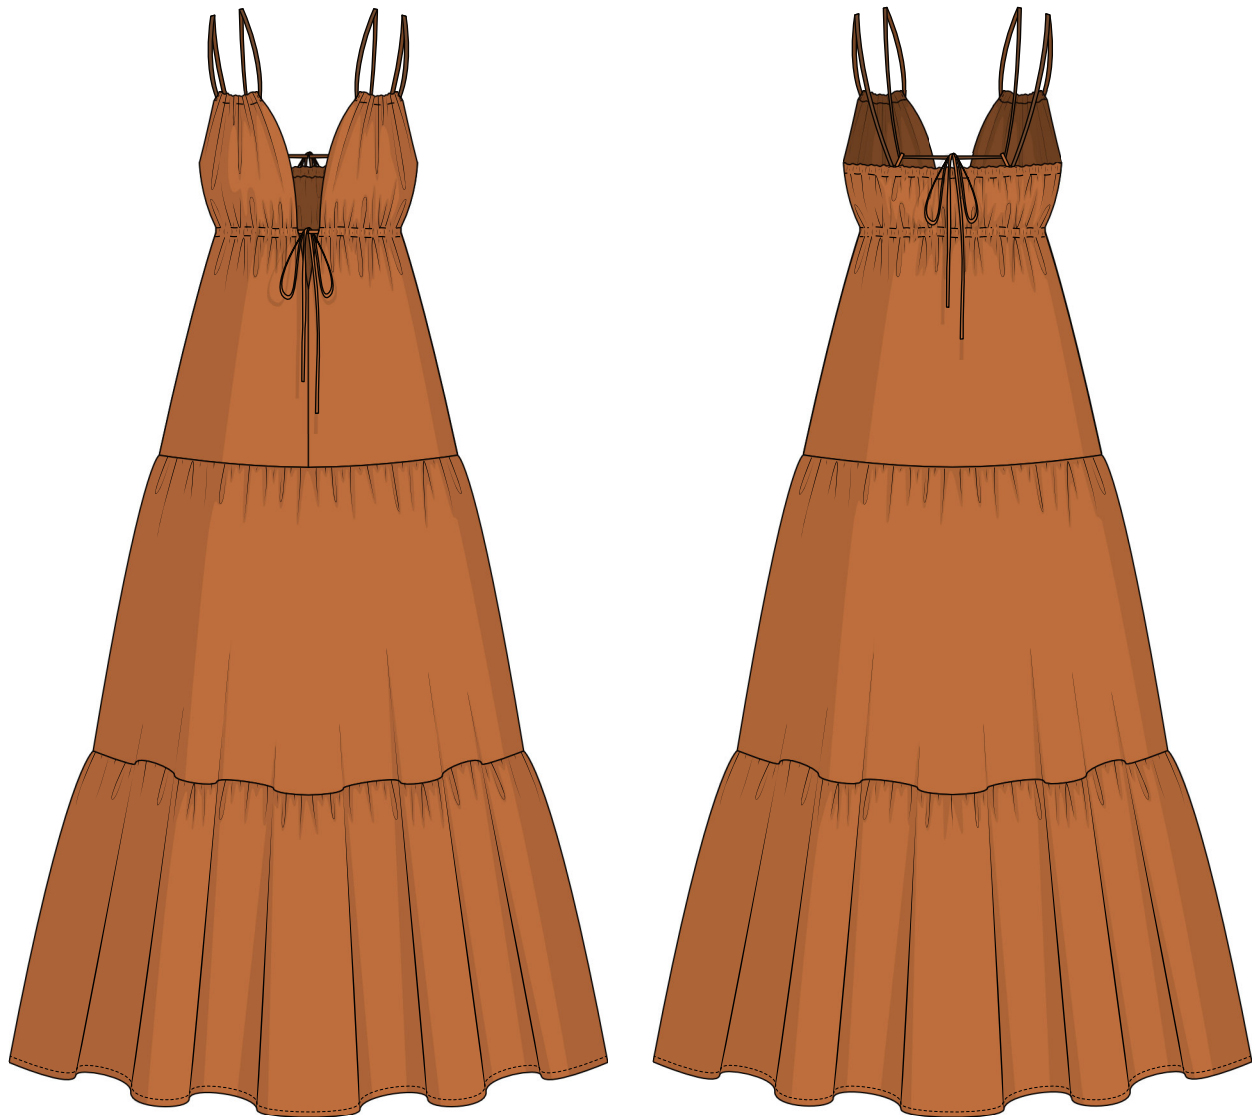

## CELINE PATTERN DESCRIPTION

---

Celine is a loose-fitting A-line tiered dress with double straps. The dress features casings above and below the bust that are threaded with ties for gathering. Celine is above-ankle length.



## IMPORTANT!

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. According to part 1 of clause 1252 and clause 1301 of the Civil Code of the Russian Federation, failure to comply with the mentioned rules constitutes a breach of the legislation in force in the field of copyright and entails liability of the violator. Illegal use or distribution will be prosecuted in accordance with legislation.

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

## TOTAL EASE ALLOWANCE

|        | Bust ease     | Waistline ease | Hipline ease  |
|--------|---------------|----------------|---------------|
| cm     | 34.8–49.2     | 55.8–70.1      | 34.4–48.8     |
| inches | 13 3/4–19 3/8 | 22–27 5/8      | 13 1/2–19 1/4 |

## GARMENT LENGTH

| Height, cm  | Back length from waist down (estimated), cm | Height, ft     | Back length from waist down (estimated), in |
|-------------|---|----------------|---|
| 1 (154–160) | 91.4–93.2                                   | 1 (5'1"–5'3")  | 36–36 3/4                                   |
| 2 (162–168) | 93.4–95.2                                   | 2 (5'4"–5'6")  | 36 3/4–37 1/2                               |
| 3 (170–176) | 95.4–97.2                                   | 3 (5'7"–5'9")  | 37 1/2–38 1/4                               |
| 4 (178–184) | 97.4–99.2                                   | 4 (5'10"–6'1") | 38 3/8–39                                   |

## SUGGESTED FABRIC

To sew this dress, choose dress-weight fabrics with the following properties:

- medium weight, soft, with good drape, non-stretch or with very little stretch, opaque
- the fiber content can include natural fibers (silk, cotton), artificial fibers (viscose), blends (cotton + silk, silk + polyester, cotton + viscose, etc.), and synthetics (polyester, polyester + elastane)
- we recommend using the following fabrics: dress-weight viscose, silk, artificial silk, cotton, poplin

**Attention!** We do not recommend stretchy knit fabrics and lightweight sheer fabrics (chiffon, organza, stretch lace).

The dress in the photo is made of textured cotton. The fabric is medium weight, soft, structured, and with very little stretch. The fiber content is 100% cotton.

Main fabric, 55" wide, with a directional print/nap, cut on the lengthwise grain, for sizes 34–36, in yards:

| Height, ft     | Meters |
|----------------|--------|
| 1 (5'1"–5'3")  | 2 7/8  |
| 2 (5'4"–5'6")  | 2 7/8  |
| 3 (5'7"–5'9")  | 3      |
| 4 (5'10"–6'1") | 3      |

Main fabric, 55" wide, with a directional print/nap, cut on the crosswise grain, for all heights, in yards:

| Size  | 34    | 36    | 38    | 40    | 42    | 44    | 46 | 48    | 50    | 52    |
|-------|-------|-------|-------|-------|-------|-------|----|-------|-------|-------|
| Yards | 3 1/8 | 3 1/4 | 3 3/8 | 3 1/2 | 3 5/8 | 3 3/4 | 4  | 4 1/8 | 4 1/4 | 4 3/8 |

Main fabric, 59" wide, with a directional print/nap, cut on the lengthwise grain, for sizes 34–40, in yards:

| Height, ft     | Size  |       |       |
|----------------|-------|-------|-------|
|                | 34–36 | 38    | 40    |
| 1 (5'1"–5'3")  | 2 3/8 | 2 5/8 | 2 7/8 |
| 2 (5'4"–5'6")  | 2 1/2 | 2 5/8 | 2 7/8 |
| 3 (5'7"–5'9")  | 2 1/2 | 2 5/8 | 3     |
| 4 (5'10"–6'1") | 2 5/8 | 2 3/4 | 3     |

Main fabric, 59" wide, with a directional print/nap, cut on the crosswise grain, for all heights, in yards:

| Size  | 34    | 36    | 38    | 40    | 42    | 44 | 46 | 48    | 50    | 52    |
|-------|-------|-------|-------|-------|-------|----|----|-------|-------|-------|
| Yards | 2 1/2 | 2 1/2 | 2 5/8 | 2 3/4 | 2 7/8 | 3  | 3  | 3 1/4 | 3 1/4 | 3 3/8 |

2. Interfacing, 140 cm wide, for all heights, in meters:

| Size   | 34–36 | 38–46 | 48–52 |
|--------|-------|-------|-------|
| Meters | 0.3   | 0.35  | 0.4   |

Interfacing, 55" wide, for all heights, in yards:

| Size  | 34–36 | 38–46 | 48–52 |
|-------|-------|-------|-------|
| Yards | 3/8   | 3/8   | 3/8   |

**IMPORTANT!** When purchasing fabric, please account for shrinkage and buy 5% more than required.





With the right side facing up, overlock the following:

- the center edge of the top front, from the neckline notch all the way down to the bottom edge
- 6 cm (2 3/8") of the neckline and armscye edges of the top front piece, starting at the upper edge



With the right side facing up, finish the outer edges of the armscye facing pieces with an overlocker.



Place the top front and armscye facing pieces right sides together and align the edges. Pin and machine-stitch, backstitching at the beginning and end.

The top of the armscye facing should overlap the casing stitching line by 1 cm (3/8").