

FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.


And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.



MARCIA PATTERN DESCRIPTION

Marcia is a loose-fitting blouse with a straight silhouette. The front features a center front seam with a deep neckline opening. The front neckline has a soft partial gathering. The stand collar features a contrast channel with a neck tie and a ruffle on the top. Marcia has a dropped shoulder with a straight long sleeve. The bottom of the sleeve is finished with a bias bound slit and is softly gathered into a cuff. The cuffs fasten with buttonholes and covered buttons. Marcia is hip length.

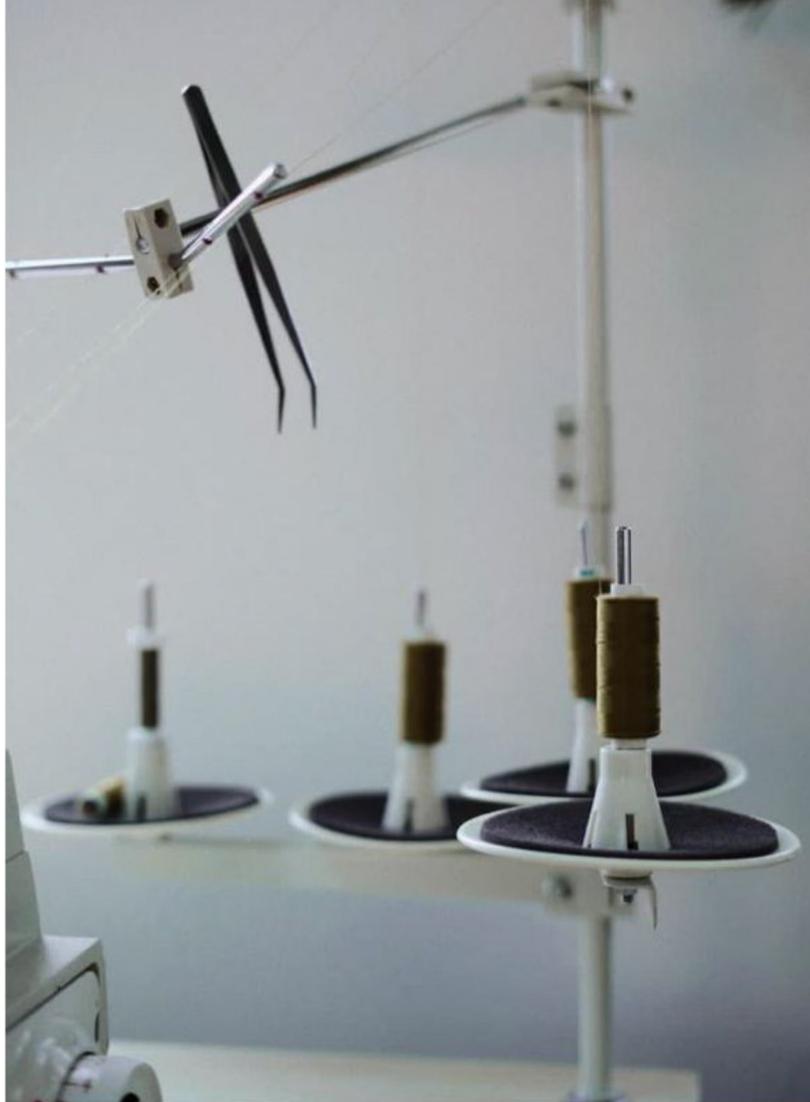

IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. According to part 1 of clause 1252 and clause 1301 of the Civil Code of the Russian Federation, failure to comply with the mentioned rules constitutes a breach of the legislation in force in the field of copyright and entails liability of the violator. Illegal use or distribution will be prosecuted in accordance with legislation.

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

Bust ease, cm	Waistline ease, cm	Hipline ease, cm	Upper arm ease, cm
28,5-28,8	44,8-45	20	8-15,5

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Garment length at the back, cm	Sleeve length including cuff, cm
1 (154-160)	63	49,5
2 (162-168)	66	51,5
3 (170-176)	69	53,5
4 (178-184)	72	55,5

SUGGESTED FABRIC

To sew this blouse, choose woven fabrics with the following properties:


- Lightweight, thin, with good drape, non-stretch or with very little stretch
- The fiber content can include natural fibers (silk), artificial (viscose), blends (silk + polyester), and synthetic (polyester, polyester + elastane)
- The following fabrics are recommended: natural or artificial silk, cupro, chiffon, thin crepe, atlas

The blouse on the photo is made in 100% silk. This fabric is thin, soft, fluid, and non-stretch.

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140cm wide, with a directional print, in meters

	Size									
Height, cm	34	36	38	40	42	44	46	48	50	52
1 (154-160)	1,19	1,19	1,2	1,2	1,23	1,46	1,47	1,48	1,52	1,54
2 (162-168)	1,27	1,27	1,28	1,28	1,3	1,53	1,54	1,55	1,59	1,61
3 (170-176)	1,32	1,32	1,33	1,33	1,35	1,59	1,6	1,61	1,65	1,67
4 (178-184)	1,37	1,37	1,37	1,38	1,4	1,64	1,65	1,66	1,7	1,72

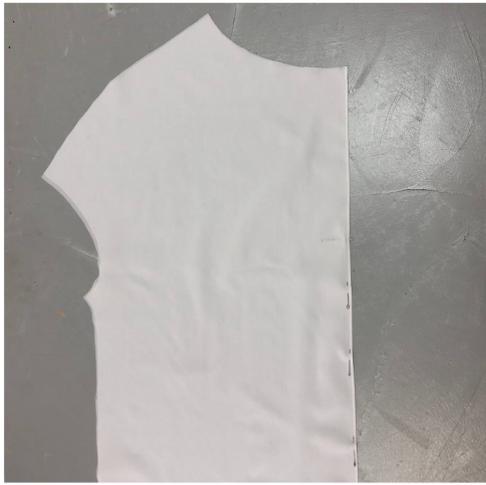

Place the front pieces right sides together and align the center fronts. Pin and baste from the neckline opening notch to the bottom edge.



Stitch on the sewing machine at 3mm from the edge, backstitching at the beginning and end.



Press the seam flat.



Press the seam allowances open.