

GLEN

(for boys)



3-14 years
HEIGHT 98-158 cm
(38.5"-62.25")

DIFFICULTY



SUITABLE FOR BEGINNERS

I M P O R T A N T !

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

G L E N

#vikisews

PATTERN DESCRIPTION

Glen is a kids' semi-fitted jumper (t-shirt) with a straight cut and a high-low hemline - shorter at the front and longer at the back. The jumper has long shirt sleeves and dropped shoulders. The crew neck is finished with a raw-edged neckband. Glen is mid-hip length.



TOTAL EASE ALLOWANCE

	Chest ease	Waistline ease	Hipline ease	Upper arm ease
cm	26.7	29.3 - 36.3	21.5	9.3 - 11.3
inches	10 1/2	11 1/2 - 14 1/4	8 1/2	3 5/8 - 4 1/2

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Center back length including neckband, cm	Long sleeve length including shoulder width and neckband, cm	Short sleeve length including shoulder width and neckband, cm
98	52.4	44.1-44.6	28.5-28.9
104	54.4	46.6-47.1	30-30.4
110	56.4	49.4-50	31.9-32.3
116	58.4	52-52.5	33.6-34
122	60.4	55-55.5	35.5-35.9
128	62.4	57.4-58.1	36.7-37.3
134	64.4	60.1-60.8	38.4-39
140	66.4	62.8-63.5	40.2-40.8
146	69.4	65.5-66.2	42-42.6
152	72.4	68.3-69.1	43.8-44.4
158	75.4	71.2-71.6	45.7-46

Height, in	Center back length including neckband, in	Long sleeve length including shoulder width and neckband, in	Short sleeve length including shoulder width and neckband, in
38.5	20 5/8	17 3/8 - 17 1/2	11 1/4 - 11 3/8
41	21 3/8	18 3/8 - 18 1/2	11 3/4 - 12
43.25	22 1/4	19 1/2 - 19 5/8	12 1/2 - 12 3/4
45.5	23	20 1/2 - 20 5/8	13 1/4 - 13 3/8
48	23 3/4	21 5/8 - 21 7/8	14 - 14 1/8
50.5	24 5/8	22 5/8 - 22 7/8	14 1/2 - 14 5/8
52.75	25 3/8	23 5/8 - 23 7/8	15 1/8 - 15 3/8
55	26 1/8	24 3/4 - 25	15 7/8 - 16 1/8
57.5	27 3/8	25 3/4 - 26 1/8	16 1/2 - 16 3/4
60	28 1/2	26 7/8 - 27 1/4	17 1/4 - 17 1/2
62.25	29 5/8	28 - 28 1/4	18 - 18 1/8

SUGGESTED FABRIC

To sew this garment, choose knit fabrics with the following properties:

- soft, breathable, medium-stretch or with very little stretch, medium-weight
- the fabric content can include natural (wool, cotton), artificial (viscose), blends (cotton + polyester, cotton + elastane, etc.), and synthetic fibers (polyester, polyester + elastane)
- the following fabrics are recommended: cotton jersey, lightweight French terry, interlock knits.

Attention! We do not recommend lightweight sheer fabrics (chiffon, organza, non-stretch lace, non-stretch fabrics).

The garment in the photo is made with medium-weight cotton jersey. This fabric is medium-weight, soft, and stretchy. The fiber content is a blend of cotton and elastane.

IMPORTANT!

When purchasing fabric, please account for shrinkage and buy 5% more than required.

2. Matching thread, 5 spools (1 spool for the sewing machine and 4 spools for the overlocker)

TOOLS AND EQUIPMENT

- sewing machine for construction
- overlocker for construction and for finishing raw edges. It may be replaced with a stretch overlock stitch or a zigzag stitch on the sewing machine (overlock or zigzag stitch width 2-3 mm, stitch length 2.5 mm)
- coverstitch or coverlock machine for finishing the garment and sleeve hems. This may be replaced with a double needle for the sewing machine.

Important. When sewing knit fabrics, it's recommended to use specialty needles for knits (such as ballpoint, STRETCH, SUPER STRETCH, JERSEY, etc.). These needles have a rounded tip which allows the needle to pass in between the loops instead of piercing the threads.

PATTERN PIECES LIST

1. From main fabric:

- front – cut 1 on fold
- back - cut 1 on fold
- sleeve - cut 2
- neckband - cut 1.

2. From interfacing:

- shoulder seam allowances on the back.

The seam allowances are to be interfaced using strips of fusible interfacing 5 mm (just under 1/4") wide and as long as the length of shoulder edge (measure on the pattern). The grainline should be parallel to the longer side of the strip (along the selvedge of the interfacing).

As an alternative to strips of interfacing, use ready-made straight grain fusible tape 5 mm (just under 1/4") wide.

IMPORTANT!

Don't forget to transfer all pattern markings and notches onto the fabric.

SEAM ALLOWANCES

All pattern pieces include seam allowances as follows:

- garment hem allowance – 2 cm (3/4")
- all other seams – 1 cm (3/8").

Take this into account when laying out pattern pieces on the fabric.




Press the seam flat, and then press the seam allowance toward the garment.

Using a pressing board for the sleeve head, steam press to shrink out the ease of the sleeve cap in the shoulder seam area.



Fold the garment wrong side out. Join the body side and sleeve edges, match the notches, as well as the sleeve-to-armscye seams. Pin and baste in place.

Stitch on the overlocker with the back facing up.

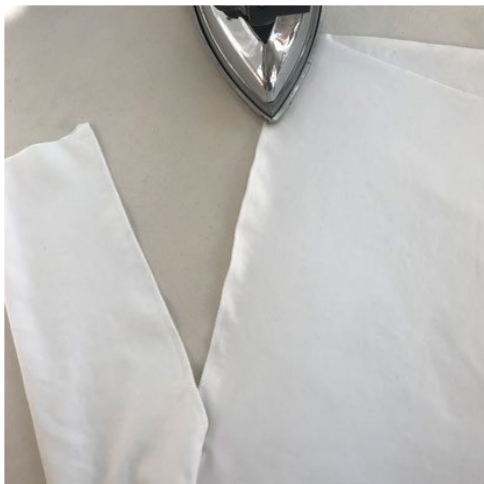

Press the seam flat.

Attention! If the seam has stretched out while machining it, steam press it to shrink out the ease.

