

# FROM THE FOUNDER OF THE #VIKISEWS BRAND

---




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at [info@vikisews.com](mailto:info@vikisews.com) — we are always there to help.

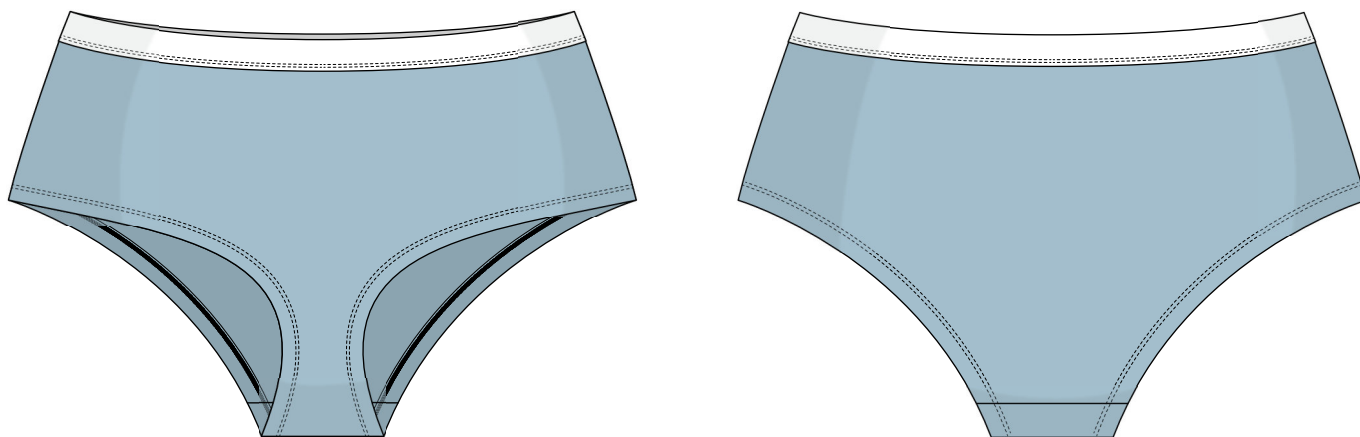

## RUN PATTERN DESCRIPTION

---

Run is a pair of mid-rise hipster briefs. The top edge is finished with an elastic band. The leg opening edges are finished with a flat seam.



## IMPORTANT!

---

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

# SUGGESTED FABRIC

To sew these hipster briefs, choose soft, stretchy, medium-weight knit fabrics made of natural fibers or blends.

We recommend using jersey.  
The stretch factor should be 1.5.

**Attention!** We recommend using only stretchy fabrics for these briefs.

You can determine the stretch factor of the fabric yourself. Mark 10 cm (4") along the crosswise grain of the fabric, lay a ruler next to the marked section, and stretch the fabric. Divide the measurement you get by 10.

The hipster briefs in the photo are made of combed jersey. The fabric is medium weight, soft, and stretchy. The fiber content is 92% cotton and 8% spandex. The fabric weight is 210 g/m<sup>2</sup>.  
The stretch factor is 1.5.

# FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 120 cm wide, with a directional print/nap, in meters:

Height, cm	Size		
	34-40	42	44-52
1 (154-160)	0.3	0.3	0.35
2 (162-168)			
3 (170-176)	0.3	0.35	0.35
4 (178-184)			

Main fabric, 47" wide, with a directional print/nap, in yards:

Height, ft	Size		
	34-40	42	44-52
1 (5'1"-5'3")	3/8	3/8	3/8
2 (5'4"-5'6")			
3 (5'7"-5'9")	3/8	3/8	3/8
4 (5'10"-6'1")			

***IMPORTANT!** When purchasing fabric, please account for shrinkage and buy 5% more than required.*

# PATTERN PIECES LIST

---

From main fabric:

- front — cut 1 on fold
- back — cut 1 on fold
- gusset — cut 1.

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

## SEAM ALLOWANCES

---

All pattern pieces include seam allowances as follows:


- leg opening edges — 1.5 cm (5/8")
- all other edges — 1 cm (3/8").

Take this into account when laying out pattern pieces on the fabric.

## CUTTING LAYOUT

---

Main fabric, 120 cm (47") wide, with a directional print/nap, cut with two folds, for all sizes in all heights

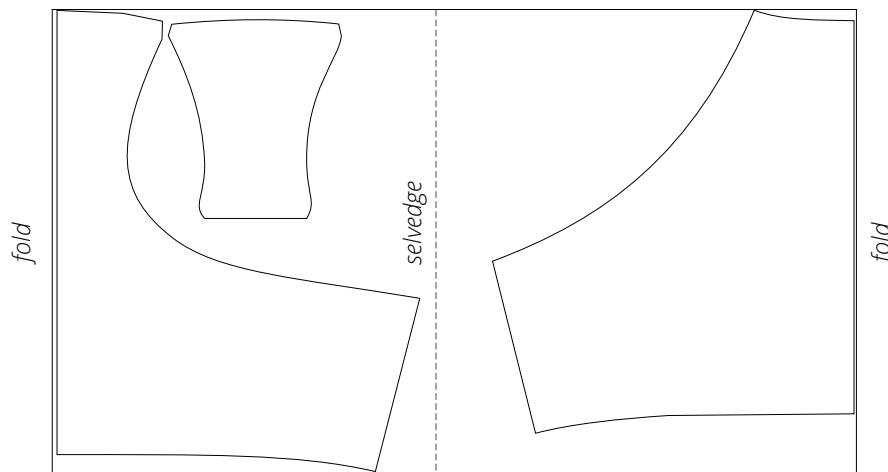

Attention! Cut one gusset piece only.

## READY? LET'S GET SEWING!

---



Hand-baste the gusset piece to the front piece, wrong sides together.



Using tailor's chalk, mark a guiding line at 3 cm (1 1/8") from the leg opening edge on the wrong side of the garment.

Press the seam allowance to the wrong side, aligning the raw edge with the marked line.



Place the front and back pieces right sides together and align the side edges. Pin.