FROM THE FOUNDER OF THE #VIKISEWS BRAND



Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.



MYRCELLA PATTERN DESCRIPTION

Myrcella is a semi-fitted dress with an accentuated waist and a free-hanging lining. The silhouette is achieved through a bias-cut design and a center back seam. The fully lined front yoke features bust darts transferred into gathering. The dress has adjustable straps and a shaped underbust seam. The back neckline is deep. Myrcella is ankle-length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease (estimated)	Waistline ease (estimated)	Hipline ease (estimated)
cm	0	11	8.4
inches	0	4 3/8	3 1/4

GARMENT LENGTH

Height, cm	Back length from waist down (estimated), cm	Height, ft	Back length from waist down (estimated), in				
1 (154–160)	84.7	1 (5'1"–5'3")	33 3/8				
2 (162–168)	87.7	2 (5'4"–5'6")	34 1/2				
3 (170–176)	90.7	3 (5'7"–5'9")	35 3/4				
4 (178–184)	93.7	4 (5'10"–6'1")	36 7/8				

SUGGESTED FABRIC

To sew this dress, choose medium-weight, soft, non-stretch or low-stretch dress-weight fabrics made of natural fibers, artificial fibers, blends, or synthetics.

The following fabrics are recommended: sateen, natural silk, artificial silk, challis.

The lining fabric should have the same properties as the main fabric. If possible, use the same fabric for the outer shell and lining, as even a slight difference in fabric properties can cause distortion of the garment shape.

The dress in the photo is made of artificial silk. The fabric is soft and flexible. The fiber content is 60% viscose, 35% polyester, and 5% elastane. The fabric weight is 150 g/m². The lining is made of the main fabric.

FABRIC AND NOTIONS REQUIREMENTS

1.1. Main fabric (outer shell + lining), 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size										
	34	36	38	40	42	44	46	48	50	52	
1 (154–160)	3.1	3.2	3.3	3.4	3.5	3.6	3.75	3.85	4	4.1	
2 (162–168)	3.15	3.25	3.35	3.45	3.55	3.65	3.75	3.9	4	4.15	
3 (170–176)	3.2	3.3	3.4	3.5	3.6	3.7	3.8	3.9	4.05	4.2	
4 (178–184)	3.25	3.35	3.45	3.55	3.65	3.75	3.85	4	4.15	4.3	

Main fabric (outer shell + lining), 55" wide, with a directional print/nap, in yards:

Size									
34	36	38	40	42	44	46	48	50	52
3 3/8	3 1/2	3 5/8	3 3/4	3 7/8	3 7/8	4 1/8	4 1/4	4 3/8	4 1/2
3 1/2	3 1/2	3 5/8	3 3/4	3 7/8	4	4 1/8	4 1/4	4 3/8	4 1/2
3 1/2	3 5/8	3 3/4	3 7/8	3 7/8	4	4 1/8	4 1/4	4 3/8	4 5/8
3 1/2	3 5/8	3 3/4	3 7/8	4	4 1/8	4 1/4	4 3/8	4 1/2	4 3/4
	3 3/8 3 1/2 3 1/2	3 3/8 3 1/2 3 1/2 3 1/2 3 1/2 3 5/8	3 3/8 3 1/2 3 5/8 3 1/2 3 1/2 3 5/8 3 1/2 3 5/8 3 3/4	3 3/8 3 1/2 3 5/8 3 3/4 3 1/2 3 1/2 3 5/8 3 3/4 3 1/2 3 5/8 3 3/4 3 7/8	34 36 38 40 42 3 3/8 3 1/2 3 5/8 3 3/4 3 7/8 3 1/2 3 1/2 3 5/8 3 3/4 3 7/8 3 1/2 3 5/8 3 3/4 3 7/8 3 1/2 3 5/8 3 3/4 3 7/8	3 3/8 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 3 1/2 3 1/2 3 5/8 3 3/4 3 7/8 4 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 4 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 4	34 36 38 40 42 44 46 3 3/8 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 4 1/8 3 1/2 3 1/2 3 5/8 3 3/4 3 7/8 4 4 1/8 3 1/2 3 5/8 3 3/4 3 7/8 4 4 1/8 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 4 4 1/8	34 36 38 40 42 44 46 48 3 3/8 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 4 1/8 4 1/4 3 1/2 3 1/2 3 5/8 3 3/4 3 7/8 4 4 1/8 4 1/4 3 1/2 3 5/8 3 3/4 3 7/8 4 4 1/8 4 1/4 3 1/2 3 5/8 3 3/4 3 7/8 4 4 1/8 4 1/4	34 36 38 40 42 44 46 48 50 3 3/8 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 4 1/8 4 1/4 4 3/8 3 1/2 3 1/2 3 5/8 3 3/4 3 7/8 4 4 1/8 4 1/4 4 3/8 3 1/2 3 5/8 3 3/4 3 7/8 4 4 1/8 4 1/4 4 3/8 3 1/2 3 5/8 3 3/4 3 7/8 3 7/8 4 4 1/8 4 1/4 4 3/8

1.2. Main fabric (outer shell only), 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size										
	34	36	38	40	42	44	46	48	50	52	
1 (154–160)	1.65	1.7	1.75	1.75	1.85	1.9	2	2.1	2.1	2.2	
2 (162–168)	1.7	1.7	1.75	1.8	1.85	1.95	2	2.1	2.15	2.25	
3 (170–176)	1.7	1.75	1.8	1.85	1.9	2	2.05	2.15	2.2	2.25	
4 (178–184)	1.75	1.8	1.8	1.9	1.95	2	2.1	2.15	2.25	2.35	

Main fabric (outer shell only), 55" wide, with a directional print/nap, in yards:

Height, ft	Size									
	34	36	38	40	42	44	46	48	50	52
1 (5′1″–5′3″)	1 3/4	1 7/8	1 7/8	1 7/8	2	2 1/8	2 1/8	2 1/4	2 1/4	2 1/4
2 (5'4"-5'6")	1 7/8	1 7/8	1 7/8	2	2	2 1/8	2 1/8	2 1/4	2 3/8	2 1/2
3 (5′7″–5′9″)	1 7/8	1 7/8	2	2	2 1/8	2 1/8	2 1/4	2 3/8	2 3/8	2 1/2
4 (5′10″-6′1″)	1 7/8	2	2	2 1/8	2 1/8	2 1/8	2 1/4	2 3/8	2 1/2	2 5/8

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size									
	34	36	38	40	42	44	46	48	50	52
1 (154–160)	1.6	1.6	1.65	1.7	1.75	1.8	1.85	1.9	2	2.1
2 (162–168)	1.6	1.65	1.7	1.7	1.75	1.8	1.9	1.95	2.05	2.1
3 (170–176)	1.65	1.65	1.7	1.75	1.8	1.85	1.95	2	2.1	2.15
4 (178–184)	1.65	1.7	1.75	1.8	1.85	1.9	1.95	2.05	2.1	2.2

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft					S	ize				
	34	36	38	40	42	44	46	48	50	52
1 (5′1″–5′3″)	1 3/4	1 3/4	1 3/4	1 7/8	1 7/8	2	2	2 1/8	2 1/8	2 1/4
2 (5'4"-5'6")	1 3/4	1 3/4	1 7/8	1 7/8	1 7/8	2	2 1/8	2 1/8	2 1/4	2 1/4
3 (5′7″–5′9″)	1 3/4	1 3/4	1 7/8	1 7/8	2	2	2 1/8	2 1/8	2 1/4	2 3/8
4 (5′10″-6′1″)	1 3/4	1 7/8	1 7/8	2	2	2 1/8	2 1/8	2 1/4	2 1/4	2 3/8

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

- 3. One set of accessories for straps: 2 sliders and 2 rings
- 4. Matching thread 2 spools

TOOLS AND EQUIPMENT

- sewing machine for construction
- loop turner

PATTERN PIECES LIST

1. From main fabric:

- front cut 1
- ∙ back cut 2
- front yoke cut 1
- strap + ring tab cut 1

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

2. From lining fabric:

- front cut 1
- back cut 2
- front yoke lining cut 1


The lining pieces can be cut out of the main or lining fabric.

SEAM ALLOWANCES

All pattern pieces include 1 cm (3/8") seam allowances. Take this into account when laying out the pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric (outer shell + lining), 140 cm (55") wide, with a directional print/nap, cut on a single layer, for all sizes in all heights

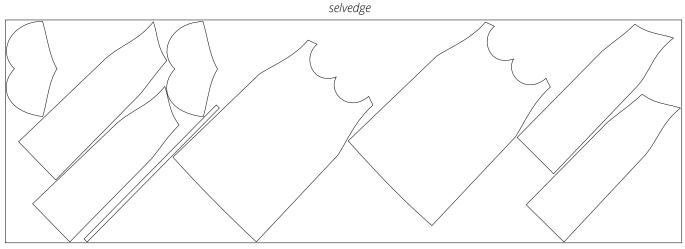


selvedge

Main fabric (outer shell only), 140 cm (55") wide, with a directional print/nap, cut on a single layer, for all sizes in all heights

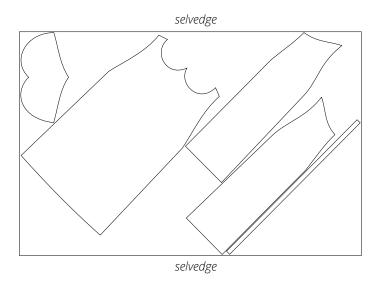

Lining fabric, 140 cm (55") wide, with a directional print, cut on a single layer, for all sizes in all heights

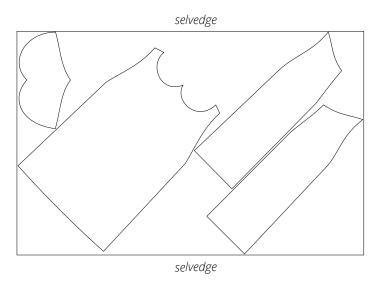

READY? LET'S GET SEWING!



Thread the ring tab through the ring and pin.



Place the ring tab onto the right side of the back piece following the pattern markings, align the edges, and pin.



Place the outer shell right sides together with the lining. Align the top edges at the back and partially at the front, match the notches and seams, and pin. Machine-stitch, backstitching at the beginning and end of the seam.