

FROM THE FOUNDER OF THE #VIKISEWS BRAND




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.

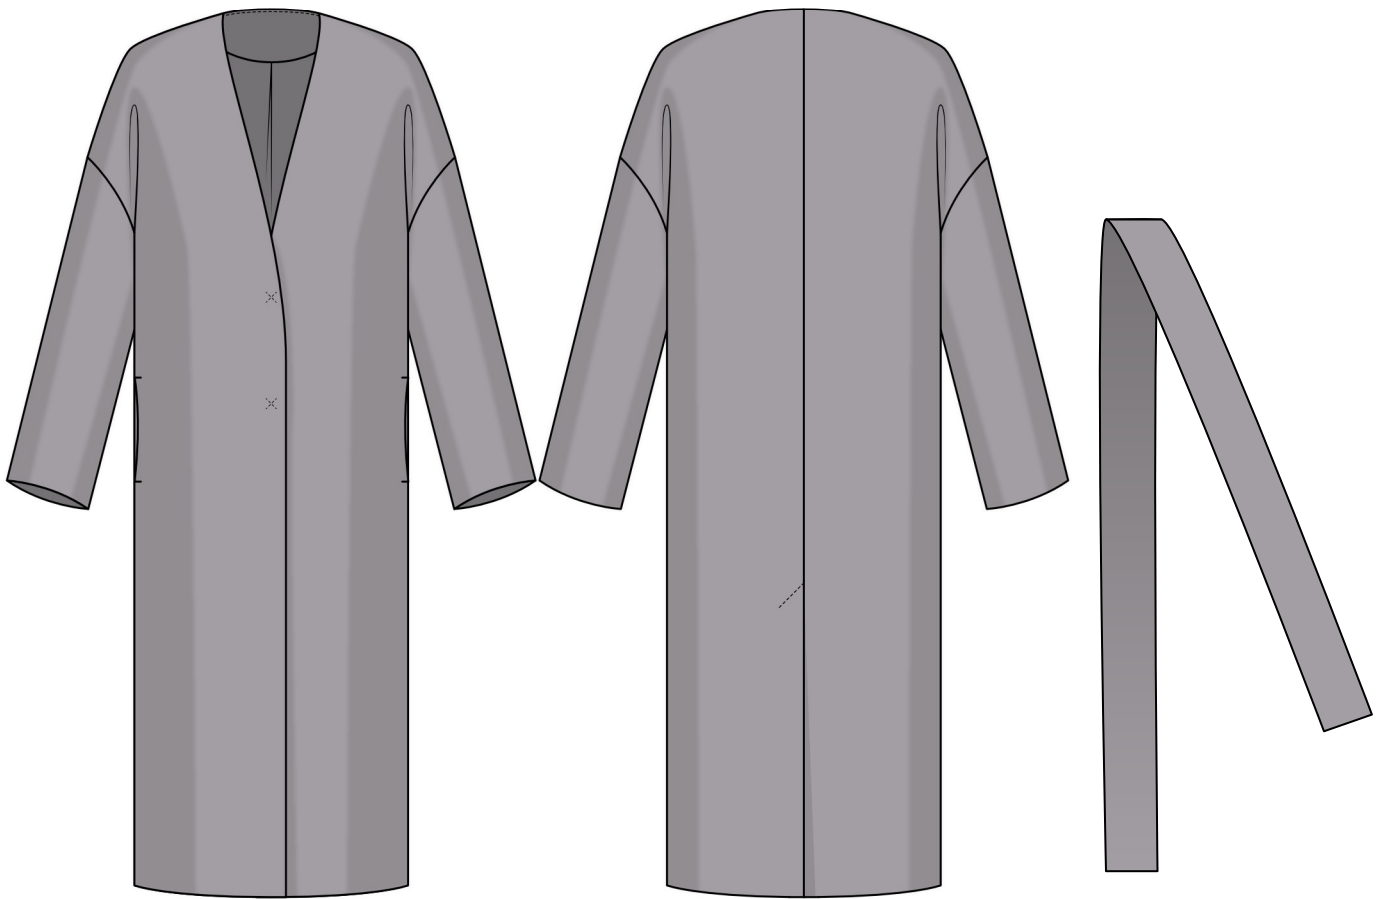

HARRIET PATTERN DESCRIPTION

Harriet is a loose-fitting, single-breasted, fully lined coat with a straight cut, drop shoulders, and no collar. The coat features long, loose-fitting, one-piece shirt sleeves. There are pockets in the side seams and a vent in the center back seam. The coat closes with two sew-on snaps at the center front. The detachable tie belt is secured with belt loops at the side seams. Harriet is above-ankle length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. **Non-compliance with the mentioned rules is a violation of the US copyright law and may result in civil liability and criminal prosecution.**

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease	Hipline ease	Upper arm ease
cm	23.4–29.1	47–57.7	24.9–33.1	14.7–21.4
inches	9 1/4–11 1/2	18 1/2–22 3/4	9 3/4–13	5 3/4–8 3/8

GARMENT LENGTH, SLEEVE LENGTH

Height, cm	Back length, cm	Sleeve length including shoulder width, cm
1 (154–160)	121.6–125.2	72–79.5
2 (162–168)	125.6–129.2	74.5–82
3 (170–176)	129.6–133.2	76.5–84
4 (178–184)	133.6–137.2	78.5–86

Height, ft	Back length, in	Sleeve length including shoulder width, in
1 (5'1"–5'3")	47 7/8–49 1/4	28 3/8–31 1/4
2 (5'4"–5'6")	49 1/2–50 7/8	29 3/8–32 1/4
3 (5'7"–5'9")	51–52 1/2	30 1/8–33 1/8
4 (5'10"–6'1")	52 5/8–54	30 7/8–33 7/8

SUGGESTED FABRIC

To sew this coat, choose coating fabrics with the following properties: medium weight, soft, non-stretch or with very little stretch. The fiber content can include natural fibers, artificial fibers, blends, or synthetics.

The following fabrics are recommended: wool, alpaca, cashmere, bouclé.

Choose plain-colored or mélange fabrics, with short or medium pile or without pile.

Attention! We do not recommend heavyweight, dense, structured fabrics.

For the lining, we recommend lining fabrics made of artificial fibers, synthetic fibers, or blends.

The coat in the photo is made of wool coating with medium pile. The fabric is medium weight, soft, and low-stretch. The fiber content is 100% wool. The fabric weight is 470 g/m².

The fiber content of the lining is a blend of viscose (45%) and polyester (55%). The fabric weight is 100 g/m².

FABRIC AND NOTIONS REQUIREMENTS

1. Main fabric, 140 cm wide, with a directional print/nap, in meters:

Height, cm	Size				
	34-36	38-40	42-44	46-48	50-52
1 (154-160)	2.55	2.6	3.2	3.25	3.3
2 (162-168)	2.65	2.7	3.3	3.35	3.4
3 (170-176)	2.75	2.8	3.45	3.45	3.5
4 (178-184)	2.8	2.85	3.5	3.55	3.6

Main fabric, 55" wide, with a directional print/nap, in yards:

Height, ft	Size				
	34-36	38-40	42-44	46-48	50-52
1 (5'1"-5'3")	2 3/4	2 7/8	3 1/2	3 1/2	3 5/8
2 (5'4"-5'6")	2 7/8	3	3 5/8	3 5/8	3 3/4
3 (5'7"-5'9")	3	3	3 3/4	3 3/4	3 7/8
4 (5'10"-6'1")	3	3 1/8	3 7/8	3 7/8	3 7/8

2. Lining fabric, 140 cm wide, with a directional print, in meters:

Height, cm	Size			
	34-38	40	42-44	46-52
1 (154-160)	1.9	2.1	2.6	2.65
2 (162-168)	1.95	2.2	2.65	2.75
3 (170-176)	2	2.3	2.75	2.8
4 (178-184)	2.05	2.45	2.85	2.9

Lining fabric, 55" wide, with a directional print, in yards:

Height, ft	Size			
	34-38	40	42-44	46-52
1 (5'1"-5'3")	2 1/8	2 1/4	2 7/8	2 7/8
2 (5'4"-5'6")	2 1/8	2 3/8	2 7/8	3
3 (5'7"-5'9")	2 1/8	2 1/2	3	3
4 (5'10"-6'1")	2 1/4	2 5/8	3 1/8	3 1/8

IMPORTANT! When purchasing fabric, please account for shrinkage and buy 5% more than required.

3. Knit or woven interfacing, 140 cm (55") wide, for all sizes in all heights

Size	34	34	38	40	42	44	46	48	50	52
meters	1.9	1.95	2	2.1	2.15	2.2	2.25	2.3	2.35	2.4
yards	2 1/8	2 1/8	2 1/8	2 1/4	2 3/8	2 3/8	2 1/2	2 1/2	2 5/8	2 5/8

- 4. Knit or woven interfacing, 140 cm (55") wide, for all sizes in all heights — 1.5 m (1 5/8 yd)
- 5. Stitched bias-cut fusible stay tape with stitch reinforcement, 1.5 cm (5/8") wide — 3.65 m (4 yd)
- 6. Two metal sew-on snaps, 2 cm (3/4") in diameter
- 7. Matching thread — 2 spools

TOOLS AND EQUIPMENT

- sewing machine for construction

PATTERN PIECES LIST

1. From main fabric:

- front — cut 2
- back — cut 2
- sleeve — cut 2
- front facing — cut 2
- back neck facing — cut 1
- pocket facing — cut 2
- tie belt — cut 1

2. From lining fabric:

- front lining — cut 2
- back lining — cut 2
- sleeve lining — cut 2
- pocket top lining — cut 2
- pocket bottom lining — cut 2

3. From interfacing:

- front facing — cut 2
- back neck facing — cut 1
- pocket facing — cut 2
- tie belt — cut 1

IMPORTANT! Don't forget to transfer all pattern markings and notches onto the fabric.

Additionally, cut the following from interfacing:

- two strips, 8 cm (3 1/8") wide (length according to the pattern), to interface the hem allowance on the front pieces
- two strips, 8 cm (3 1/8") wide (length according to the pattern), to interface the hem allowance on the back pieces
- two strips, 8 cm (3 1/8") wide (length according to the pattern), to interface the hem allowance on the sleeve pieces
- one strip (size according to the pattern) to interface the vent extension

The interfacing strips should be cut on the straight grain (parallel to the selvedge).

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- garment hem allowance — 4 cm (1 5/8")
- sleeve hem allowance — 4 cm (1 5/8")
- pocket lining curved edges — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")

Take this into account when laying out pattern pieces on the fabric.


CUTTING LAYOUT

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a partial fold, for sizes 34–40 in all heights

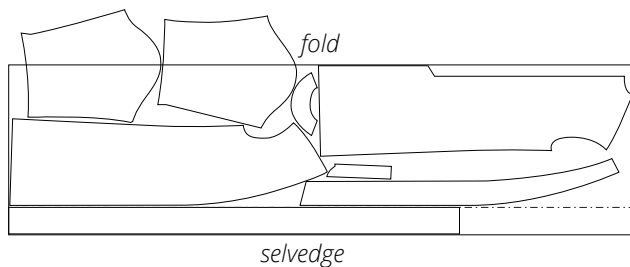


IMPORTANT! Cut the sleeve pieces on a single layer out of the leftover fabric. Cut only one back neck facing piece.

Main fabric, 140 cm (55") wide, with a directional print/nap, cut on a partial fold, for sizes 42–52 in all heights

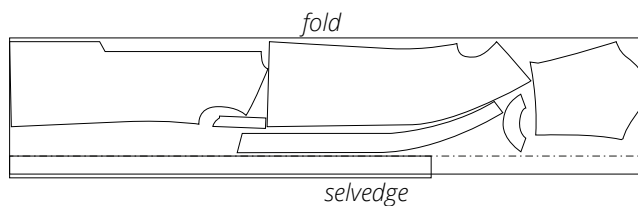


IMPORTANT! Cut only one back neck facing piece.


Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for sizes 34–38 in all heights

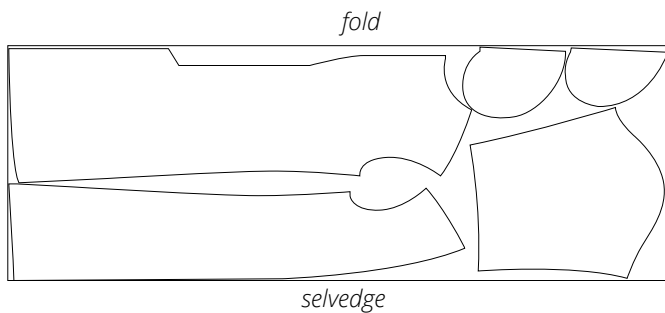

Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for size 40 in all heights

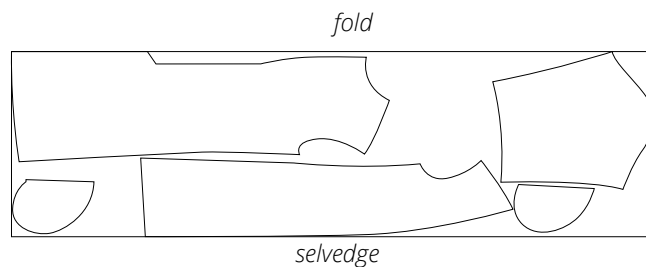


Lining fabric, 140 cm (55") wide, with a directional print, cut on fold, for sizes 42-52 in all heights

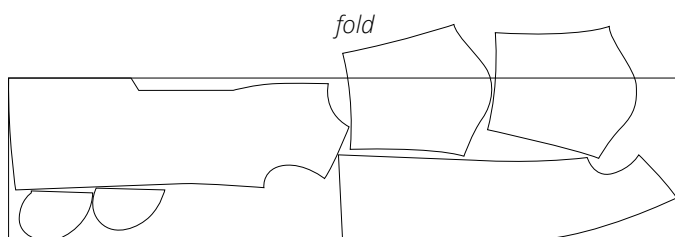

IMPORTANT! Cut the sleeve lining pieces on a single layer out of the leftover fabric.

Interfacing, 140 cm (55") wide, cut on fold, for all sizes in all heights

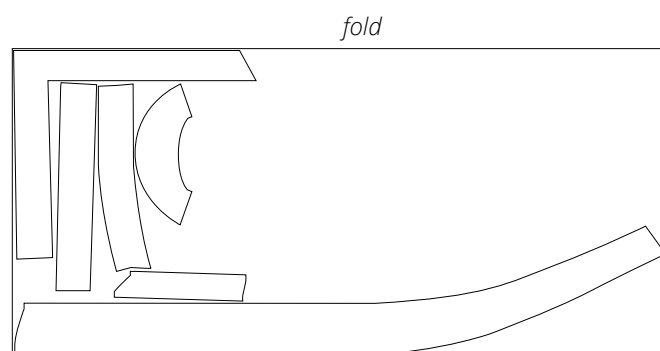


IMPORTANT! Cut only one back neck facing piece.


READY? LET'S GET SEWING!



Press the seam allowances towards the pocket lining.

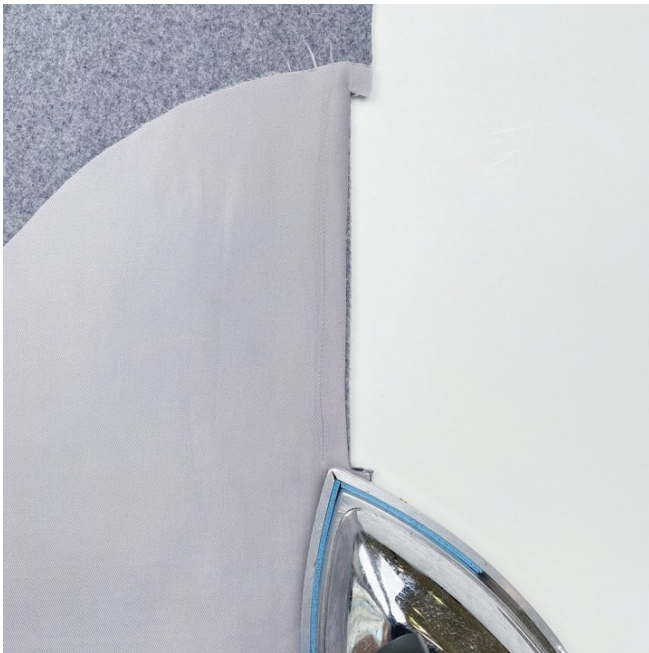

Fold the pocket lining to the wrong side of the front piece. Press the pocket opening, positioning the seam right on the edge.

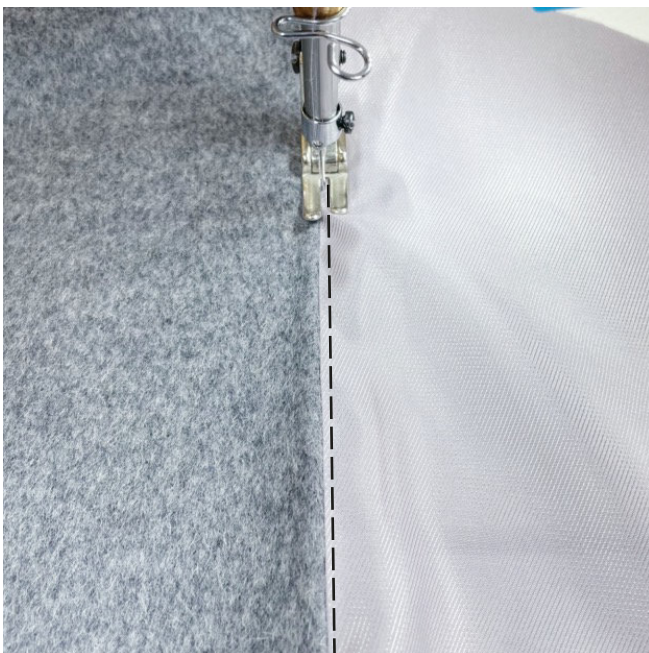

Working on the right side, understitch the seam allowances to the pocket lining at 1–2 mm from the seam. Backstitch at the beginning and end of the seam.